



FONTUS (SCREEN CONTROL)

v 1.2 | 18 October 2021

Power and Control over 2-Conductors

Features

- No programming needed
- Plug-n-Play
- Full 2-way 485 Control (with additional codec)
- 12v trigger for use with projectors
- Dry Contacts for use with any control systems
- IR input for use with included IR Receiver & Remote (1 Screen Control Kit)
- Phantom power - only available when used with the correct cabling. (Please contact SI for help or to see if you have the correct cabling)
- Low Voltage Power Input - Fontus can receive power via any 7v - 28v DC power
- Connectors are compatible with all 485 screens

Inputs / Outputs

- BCP - Inverted Header Side
- 485 - Header Side

Power Input


7v - 28v DC

Max. Wiring Distance (UTP)

- 18 / 2 up to 150'
- 16 / 2 up to 200'

Optional Accessories

- Din Rail Bracket
- Single Gang Decora Keypad

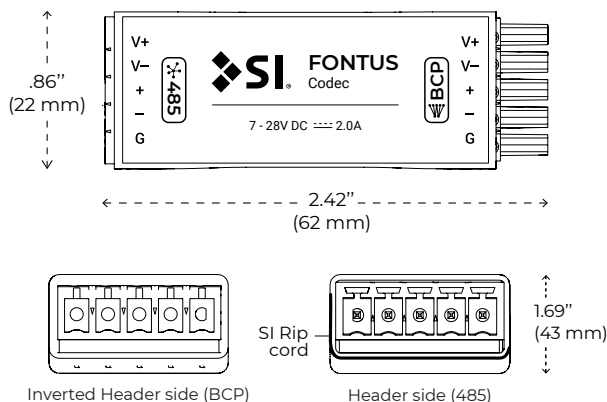

Fontus Specifications

For illustration purposes only

Dimensions

0.86" L x 2.42" W
(22 mm x 62 mm)

Package Options - In the Box

1 Screen Control Kit- #201477

1 Fontus Codec, 1 IR Receiver, 1 Power Supply & 1 Remote

Color

White (default), and Black via SI rip cord

All Fontus come with their corresponding mating

Works with

- Nano shades
- Zen shades
- Solo / Pro 2 Screen
- Motorized 3 / 5 Screens
- Janus
- Fontus Keypad
- Duocoup