



Solo™ 2 / Pro Screens

Small Cassette. Big Screen.





SOLO PRO 2

Biggest little screen ever made

SOLO PRO 2

2 Different Cassette Sizes – Medium and Large
Max diagonal of 160" and max. drop of 12"

Features and Benefits


- World's smallest screen case system
- Max. of 160-inch (4064mm) motorized screen in a cassette just under 4.75-inches (121mm)
- Compact design can be easily transported and installed
- Power in 3 available motor types including patent-pending magnetic rechargeable, 24v low-voltage, and AC power
- 7 colors options - White, Warm White, Clear Anodized, Taupe, Char Brown, Dark Grey and Black cassette and end caps
- 5 different kinds of brackets available for mounting, including Suspended Ceiling install option.
- Available in 10 screen material options.
- Standard and Reverse orientation options available.

Note: Reverse is not available on diagonals greater than 110" or with 36" drop or with Short Throw .6

Power and Control

Solo Pro 2 is configurable in 3 available motor types including patent-pending magnetic rechargeable, 24v low-voltage, and even AC power.

- **RTS Wire-Free** motor option with Lithium-ion Rechargeable battery, featuring Screen Innovations® magnetized recharging port for easy access.
- **24v low-voltage** motors available in either 485 control for wired integration into building control systems, or wireless RTS control via many wireless control accessory options.
- **110v line-voltage** motors in either 485 control for wired integration into building control systems, or wireless RTS control via many wireless control accessory options.

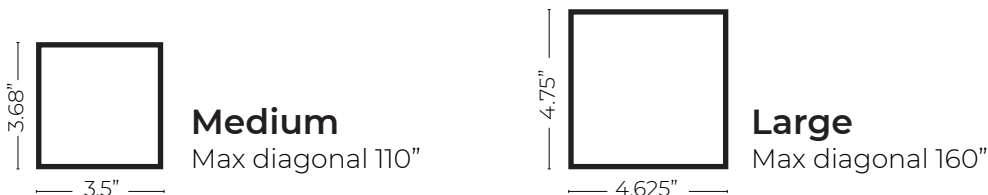



SOLO 2

Biggest little screen ever made

SOLO 2

2 Different Cassette Sizes – Medium and Large.
Max diagonal of 160" and max. drop of 12"

Features and Benefits


- World's smallest screen case system
- Max. of 160-inch (4064mm) motorized screen in a cassette just under 4.75-inches (121mm)
- Compact design can be easily transported and installed
- Power in 3 available motor types including patent-pending magnetic rechargeable, 24v low-voltage, and AC power
- Solo 2 available in Anodized color cassette and end caps.
- 5 different kinds of brackets available for mounting, including Suspended Ceiling install option.
- Available in Pure Gray .85 and Pure White .85 screen material options.
- Standard and Reverse orientation options available.

Note: Reverse is not available on diagonals greater than 110" or with 36" drop or with Short Throw .6


Power and Control

Solo 2 is configurable in 3 available motor types including patent-pending magnetic rechargeable, 24v low-voltage, and even AC power.

- **RTS Wire-Free** motor option with Lithium-ion Rechargeable battery, featuring Screen Innovations® magnetized recharging port for easy access.
- **24v low-voltage** motors available in either 485 control for wired integration into building control systems, or wireless RTS control via many wireless control accessory options.
- **110v line-voltage** motors in either 485 control for wired integration into building control systems, or wireless RTS control via many wireless control accessory options.




Medium
Max diagonal 110"




Large
Max diagonal 160"

Contemporary Design

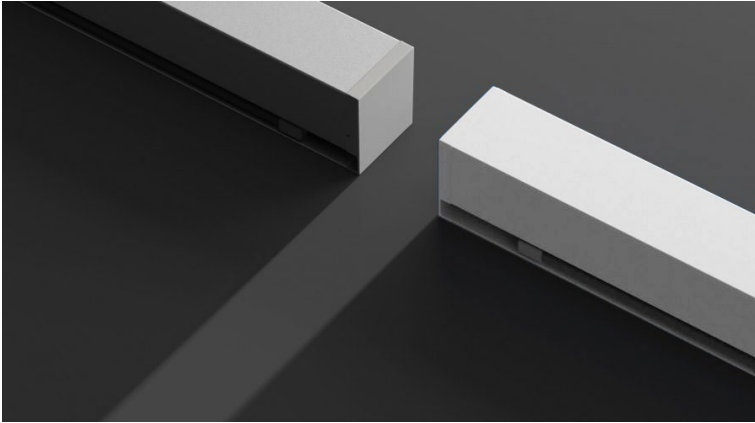

Completely re-engineered Solo Pro 2 with all-new internals making it tiny, but capable of going big.

Mounting Bracket Options

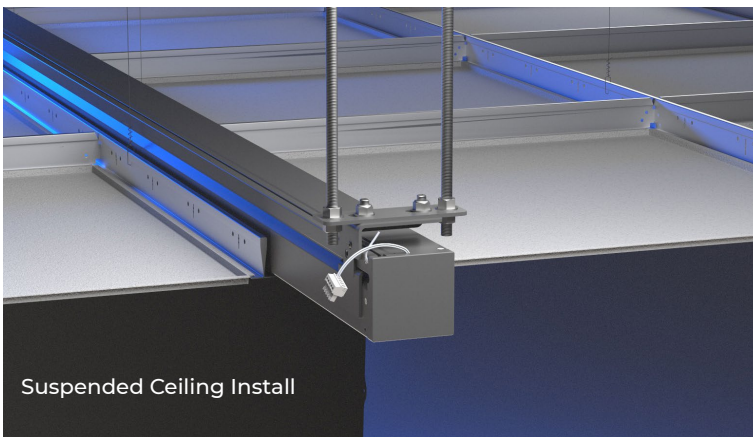

Ceiling/Wall
Locking (incl. std.)



Décora Flying



Suspended
Ceiling



Décora Ceiling



Zero Gap Wall

Color Options

Solo Pro 2 has 7 color options:

White | Warm White | Clear Anodized | Taupe | Char Brown | Dark Grey | Black cassette and matching end caps.

Solo 2 available in Anodized color cassette and end caps.

Screen Material Options



Solo Pro 2 offers many screen material options including high performance ALR materials like Slate 1.2 and Short Throw to achieve high contrast images.

Solo 2 offers only Pure White .85 and Pure Gray .85 options, with 4k+ resolution.


Power & Control



Rechargeable Lithium
RTS

Available in: Medium


Rechargeable battery-powered screens, combined with RTS (one-way) is available. The battery lasts up to 500 cycles on a single charge. Our magnetic connector offers effortless connection and recharging. Stop using expensive, toxic, throw-away batteries, while helping to better protect our landfills and ground-water.

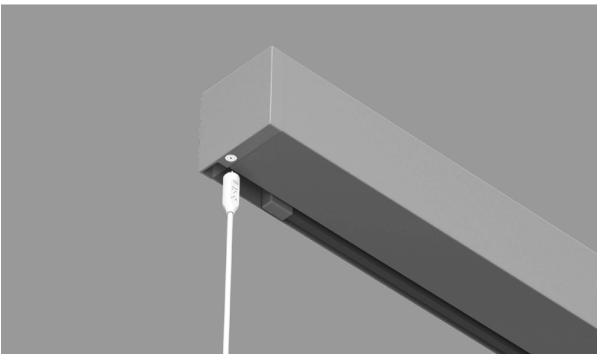

24v DC
RTS | 485

Available in: Medium | Large

Low voltage power offers a great solution where wire already exists or running wire is possible, in many cases without the need for an electrician (see your local code). Powerful 24v motors handle screens up to 160" diagonal, are very quiet, feature soft start/stop, and either 485 or RTS control.




110v AC
RTS | 485








Available in: Medium | Large

Powerful and quiet, our 115v motors handle screens up to 160". Options for control include RTS and 485.

Screen Sizes and Measurements

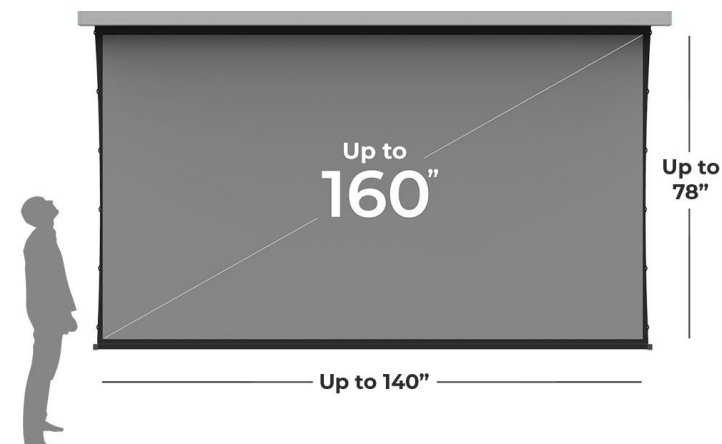

We fit a 160-inch (4064mm) motorized screen in a cassette just under 4.75-inches (121mm). Solo 2 is the smallest motorized screen family on the planet.

		Max Drop*			Motor			Orientation	
		12"	24"	36"	Lithium RTS	Low Voltage RTS RS485	AC (110v) RTS RS485	Reverse	Standard
Max Diagonal	80" - 106"	M	M	NA	M	M	M	M	M
	107" - 110"	M	M	L	M	M L	M L	M	M L
	111" - 160"	L	L	L	NA	L	L	NA	L
M	 3.687" (94mm) 3.5" (90mm)	 3.43" (87mm) 2.01" (51mm) 3.78" (96mm)	 Standard Bracket 0.31" (8mm) 0.5" (13mm)	Reverse Orientation					
Medium				 Standard Bracket 3.38" (86mm)					
L	 4.75" (121mm) 4.625" (117mm)	 3.43" (87mm) 2.02" (51mm) 4.88" (124mm)	 Standard Bracket 0.25" (7mm) 0.5" (13mm)	NA					
Large									
NA	Not Applicable								

*Short Throw screen material, max. size is 100", and max. drop is 2"

Aspect Ratio

16:9 | 16:10

Passed third party fire performance evaluation in accordance with underwriters laboratories (UL) 2043-13, fire test for heat and visible smoke release for discrete products and their accessories installed in air-handling spaces

Connectivity & Accessories



Zero Gap Wall
Brackets



Wall & Ceiling
Brackets (incl.)



Decora Ceiling
Brackets



Decora Flying
Brackets



Suspended Ceiling
Brackets



Data Hub



USB Programming
Kit



Magnetic Charging
Cable



Solo Remote (incl.)



SI IR Receiver &
Remote



Fontus



Janus



SiFi



Connect



LinkPro Z



TaHoma



myLink



SDN Decoflex
Digital 6/8 button



Decoflex Wirefree
1 - 5 channels



Smooove 1 RTS



Telis 1/4 Soliris RTS
Remote



Telis 1 Chronis
Remote



Telis 1/4 RTS
Remote



Telis 4 Modulis RTS
Remote



Situo 1 - 4 Channel
Remote

No matter what power type we have you connected!

Wired - Janus

Ultra-high density 485 power and control hub. JANUS is a dual-sided product with both UTP (category) and terminal connection, and is capable of supplying power and control over many types of wire.



Janus



SI.FI

- Redundant Power
- Infinitely scalable: Each Janus can run up to 8 screens
- One product two faces: JANUS is a dual-sided product with both UTP (Cat5e - Cat6) and Terminal block connections, capable of supplying power and control over many types of wire.
- Panel or rack mount in 1/4 the space.
- Optional IP Control - The Screen Innovations® SI.FI. - 485 control gateway over IP or RS232

- Available in Plenum-rated - Solid state with no moving parts - redundant power options for 3rd Party battery backup power source.



Wireless - RTS



Link Pro Z



TaHoma

- RTS is one way communication for robust Wireless Control and can communicate with virtually any integration protocol on the planet.
- RTS is simple and easy to use RF technology.



Control

“Alexa, turn on movie time.”

For the ultimate freedom, Solo 2 screens can be integrated into the Amazon Echo ecosystem allowing voice commands to control your screen.

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.



Control4


CRESTRON

ELAN

SAVANT

TaHoma™ App

Complete control of your screen in the palm of your hands.

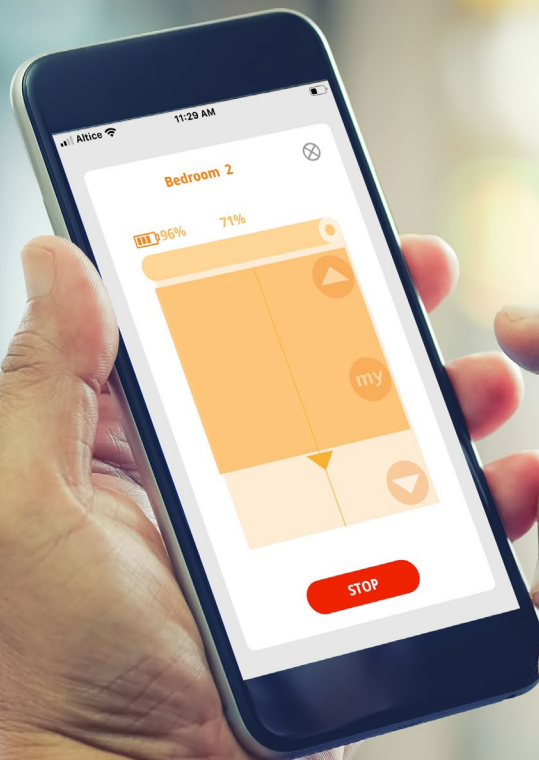



Screen Innovations®
9715-B Burnet Rd, Suite 400 Austin, TX 78758
512.832.6939
www.screeninnovations.com
commercialsales@screeninnovations.com