

SoloTM 3 Outdoor

The future of screens, made modern



SOLO 3

2 Cassette Sizes – 575 | 675 | Max width up to 16'

Features and Benefits


- Solo 3 Outdoor is the industry's first architectural design-focused outdoor screen solution, seamlessly blending into today's home designs. Transform your outdoor area into a comfortable, stylish living space
- AC, Low-Voltage, and Solar Rechargeable power options available
- Choose between 9 powder-coated colors or a custom paintable primed option for a perfect color blend
- Zipper system aids screen stabilization
- Available in 360 and Maestro material options.
- New optional external Moab Control Board– including local control pad buttons which can set and adjust limits, a built-in IR receiver and IR Remote control, and third party control inputs for 12v trigger, dry contact, and two-way 485 with every low voltage and AC 485 motor
- With a unique snap-in tube and hidden bracket attachment, Solo 3 outdoor installs in half the time of innovative outdoor projection screens.
- Optional preconstruction channels allow contractors to fur the track for smooth installation
- Suitable for light wind control; optional anemometer accessory automatically raises the screen in higher winds (RTS only)
- Built-in obstruction detection stops and reverses the Solo 3 Outdoor screen, preventing damage or injury (RTS only)
- Quiet, durable operation using outdoor rated motors and components.
- Programmable limits. Fine tunable using a remote, or through TaHoma/ TRO.Y.

Big Dreams, Made Reality



Turn any outdoor space into a home theater.

Unsure about seating? Double your options with 360 Twin View and project onto both sides of the screen!

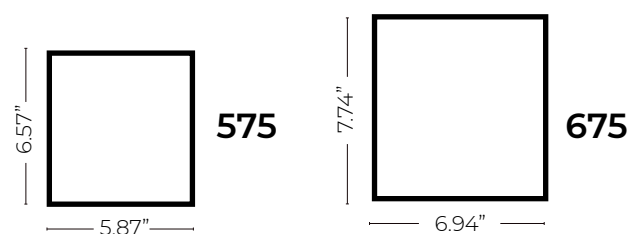


Clean, Modern Design




Timeless and classic, our crisp design compliments any modern décor.


Mounting Options and Brackets

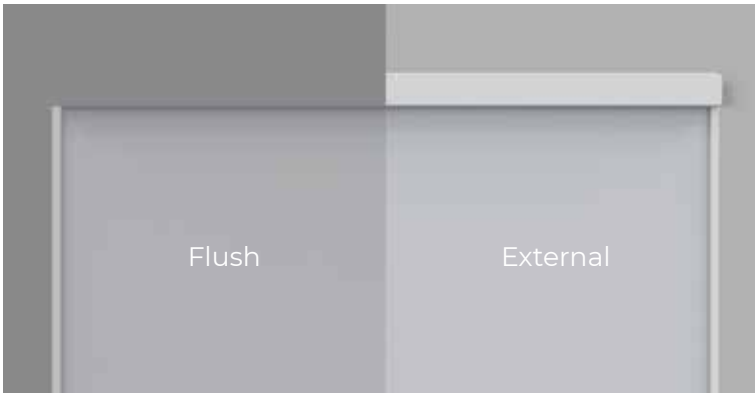


Choose to hide away or display your screen with our different mounting options.




External Wall Mount



External Ceiling Mount



Pocket Wall Mount



Pocket Ceiling Mount

Screen Material Options and Sizes



Maestro

- AC - Maestro (Max Height 10.5, Max Width 16')
- LV & Solar - Maestro (Max Height 10.5, Max Width 12')



360 Rear-Pro

- AC- 360 (Max height 9', Max Width 16')
- LV & Solar - 360 (Max height 9', Max Width 12')

Aspect Ratio

16:9 | 16:10


Color Options




Solo 3 Outdoor offers nine (9) standard powder coat options: Anthracite, Beach Sand, Carbon, Corten, Dune, Glacier, Granite, Urban Bronze, White Quartz, or primed for exterior paint.

Power and Control


AC, LV and Solar Rechargeable Power options



110v AC
RTS | 485*
Rated Current: 2.1A




12v DC
RTS
Rated Current: 2.2A



Solar Rechargeable
RTS
Rated Current: 2.2A

*Contact Design Services

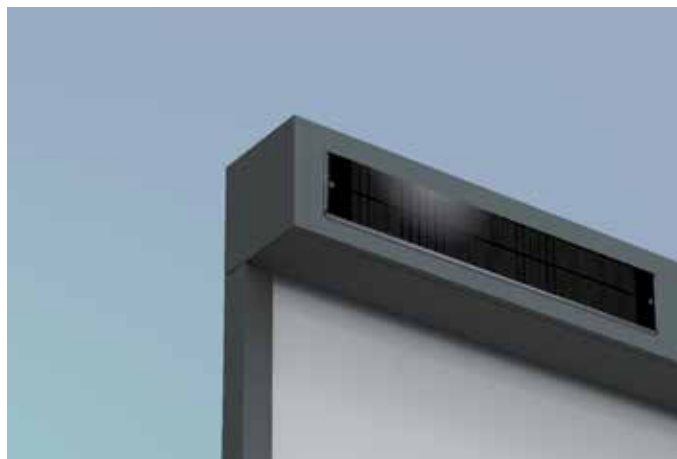

Zipper Tracks & Cable Guides












Keep your screen sturdy, uncreased, and safe with Zipper Tracks to minimize screen movement and protect the material.





- External - Optional Zipper Tracks (360, Maestro)
Optional Cable Guides (Maestro only)
- Pocket - Optional Cable Guides (Maestro only)

Flush and External Mount Dimensions

Screen Sizes and Measurements








External Mount Dimensions				
575	 <p>5.859" (149mm)</p> <p>5.605" (142mm)</p>	Wall Mount bracket  <p>4" (102mm)</p> <p>5.64" (143mm)</p> <p>6.52" (166mm)</p>	Ceiling Mount bracket  <p>4" (102mm)</p> <p>5.25" (133mm)</p> <p>0.71" (18mm)</p>	 <p>1 3/16" (20mm)</p> <p>1 1/8" (29mm)</p>
	 <p>7.031" (179mm)</p> <p>6.730" (171mm)</p>			 <p>1 3/16" (21mm)</p> <p>1/16 - 1/8" (1.6 - 3.2mm)</p> <p>1 5/16" (34mm)</p>
Pocket Mount Dimensions				
575	Pocket Dimensions  <p>12"</p> <p>7"</p>	Jamb mount  <p>4.03"</p> <p>4.25"</p> <p>6.07"</p>	Ceiling mount  <p>4.03"</p> <p>4.04"</p> <p>6.07"</p>	NA
675				

Zipper Track Measurements

 <p>1.51" 1.45"</p> <p>Weight Bar</p>	 <p>1.90" 1.33"</p> <p>Gasket</p>	 <p>1.80" 1.68"</p> <p>Zipper Track</p>	 <p>1.92" 1.83"</p> <p>Pre-Construction Channel</p>
--	--	---	--

Accessories (Hardware and Controls)

AC – 110/220v AC



No matter the power type, we have you connected!

Wired 485

Ultra-high density 485 control hub Suite XVI and TRO.Y IP Gateway combine to give you the ultimate screen control and design versatility.



Suite XVI



TRO.Y

- Infinitely scalable: each Suite XVI runs up to 16 screens and has cascable buses for large systems
- 4 segmented motor ports for robust and reliable communication
- Panel or rack mount in a quarter of the space.
- IP and RS232 control options available when connected to Screen Innovations® TRO.Y-control gateway
- Available in a plenum-rated solid state enclosure with no moving parts

 **CRESTRON**  **AMX**  **Extron**  **QSC**  **ELAN**  **Control4**  **LUTRON**

Wireless RTS



LinkPro Z



TaHoma

- RTS is simple and easy-to-use RF technology.

 **CRESTRON**  **SAVANT**  **Control4**
 **ELAN**  **JOSH**  **URC**
 **brilliant**  **ALARM.COM**
 Works with **SmartThings**



Screen Innovations®
9715-B Burnet Rd, Suite 400 Austin, TX 78758
512.832.6939
www.screeninnovations.com
sales@screeninnovations.com