



Zigbee 3.0 Edge Router

Features

- Professionally installed in the wall, this Zigbee 3.0 Edge Router expands and allows robust communication, helps extend battery life of Zigbee 3.0 Shades and enables Zigbee Remotes to control shades with or without Internet connection.
- Includes one always-on outlet and one Zigbee controlled outlet
- Can be controlled via TaHoma app or third party control systems
- Decora style insert can be ganged with other Decora style products

Power

125v AC, 60Hz

Total load for both outlets

(Max) 1800W@15A (Resistive)

Load for Zigbee-controlled outlet


(Max) 1000W incandescent, 1/2HP motor, 1800W@15A (Resistive) or 3.75A LED/CFL

Operating Temperature

32-104° F (0-40° C)

Radio Frequency

2.4 GHz

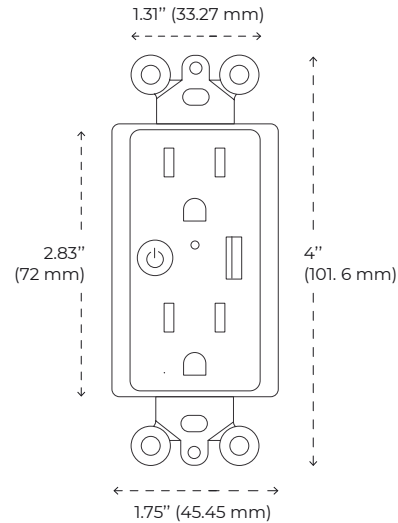

Smart Outlet Specifications

For illustration purposes only

Dimensions

1.92" D x 1.75" W x 4" H
(48.76 mm x 45.45 mm x 101.6 mm)

Parts in the Box

#43132

Smart Outlet, Screws (2), Trim plate, Installation Instructions.

Installation Best Practices

10m between any Zigbee devices per room, 1 unit— up to 15 shades (every 15th shade, add an additional unit).

Works with

- Link Pro Z
- TaHoma
- Situo remotes
- Nano Shades
- TaHoma App
- Smart Plug