



Smart Plug 2

v 1.1 | June 2023

Zigbee Router

Features

- Remotely control on/off lighting and small appliances (<1800W)
- Create scenes and schedule together with automated shades
- Extend the Zigbee network range
- Fits into standard wall socket without overlapping
- Control on/off locally by pressing the button on the Plug
- Set up easily in TRO.Y or the TaHoma app with the QR code on the Plug
- Recommend one Smart Plug for every sixteen wirefree motors

Radio Protocol

Zigbee 3.0

Power

Input: 120V AC / 60Hz, Max 15A
Output: 120V AC / 60 Hz, Max 15A


Radio Frequency

2.4 GHz


Operating Temperature

32°F – 104°F (0° – 40°C)

Connections and Indicators

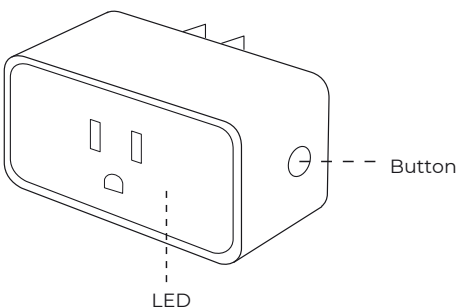

Plug State	LED Status	Descriptions
On	Quick flashing orange and green alternately	The plug enters pairing mode and is ready to connect to the Zigbee network.
	Solid green for 3 seconds	The plug succeeds to connect to the Zigbee network.
	Solid red for 3 seconds	The plug fails to connect to the Zigbee network.
	Solid Green	Output is enabled after pairing to the Zigbee network.
	Off	The plug does not pair to any Zigbee network
Off	Off	The plug is powered off

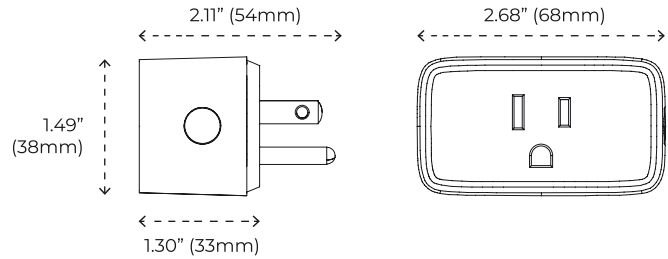

Smart Plug 2 Specifications

For illustration purposes only

Dimensions

2.67" L X 1.49" H X 1.29" W
(68mm L x 38mm H x 33mm W)

Parts in the Box

1871217

Smart Plug (1), User Instructions (1)

Works with

- Nano shades
- Zen 2 shades
- Solo 3 screen
- TRO.Y 2
- SI App (BBP)
- 3rd party Ceiling fans
- 3rd party Fireplaces