




NANO BOX 375 COUPLED

v 1.5 | 24 May 2022

One motor, multiple shades

Features

- World's smallest coupled shade cassette system
- Modular design which can be easily transported and installed
- Low Voltage or AC Power
- Overall up to 300" for 24v DC shades and 480" for 110v AC shades - (4 shades max.) based of fabric selection and height
- Ultra-quiet operation, including soft start/stop technology with the low voltage motor option
- Programmable limits. Fine tunable using the remote, or the app, depending on configuration
- Smallest lightgaps in the industry, only 1" between each shade
- Perfect hembar alignment through coupler micro-adjustments so shades move in perfect unison. Hembar speeds programmable on LV motor options
- Optional Side & Sill Channels eliminate light gaps for a blackout experience
- Expansive textile / fabric options with UV blocking Sunscreen, Light Filtering, Privacy, and Black-out available, with many designer color and texture options to choose from. A large selection of commercial grade fabric options from industry leading suppliers carrying a range of testing certifications and compliance ratings, including fire ratings under NFPA 701-10 California Title 19, Bacterial & Fungal Resistance under ASTM E2180, ASTM G21, RoHS compliance fabrics, many with GREENGUARD certification, and various Acoustical Ratings for sound absorption, depending on fabric. Several fabric manufacturers and custom fabric options available
- Power failure memory for the life of the shade
- Available in Wired control using Janus, SIFI, and Fontus, or Wireless using RTS technology
- Low voltage power and communication over Category cable, or over existing 2-wire install

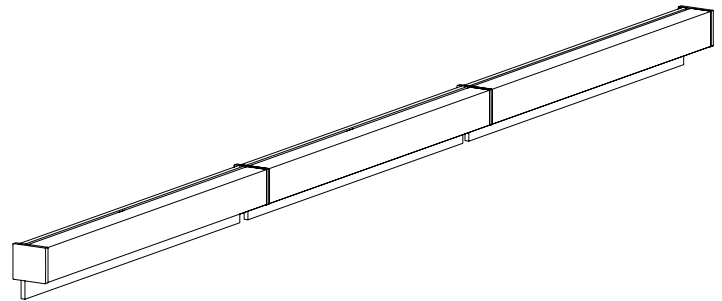

Nano Box 375 Coupled Specifications

For illustration purposes only

Colors

Available in 12 colors. (Powder coated)

Sizes

375 only

Methods of Control

Wired Integration and control

- IP control for all popular control systems - 485
- Serial 232
- Contact closure (global and local)
- 12 v trigger
- 0-10v

Wireless Integration and control

- RTS (global and local)
- IR

Note: Fabric selection may limit the size of the shade. Use the SI Flow Tool and SI Design Services for help determining shade size and fabric selection compatibility



NANO BOX 375 COUPLED

v 1.5 | 24 May 2022

Specifications

Power

- Low Voltage Power, with operating voltage: (class 2, 24-28v DC)
- Line Level Voltage Power, with operating voltage: (110v AC, 50 - 60Hz)
- Power supply features over/under-voltage, over/under current, and thermal protection for all devices in the system
- Electrostatic isolated and galvanic isolation
- Non-volatile memory, meaning programming is protected in the case of a power failure
- Must use Screen Innovations supplied power source for all low-voltage and Power charging


Compatible power sources

Configurable in 2 available motor types:



24v DC
RTS | 485

375



110v AC
RTS | 485

375

Max overall width of 300" on the DC motor and 480" on the AC motor based of fabric selection and height

Flexible Configuration

- Create scenes, groups, and set times
- Systems we integrate with:

NANO 485 shades - AMX, BCP, Control4, Crestron SIMPL, Crestron Home*, Dry Contact Closures, Elan, IP, IR, Lutron, Loxone, RS-232, RS-485, RTI, Savant, URC, 0-10v, 12vTrigger
NANO RTS shades - Alexa, Control4, Crestron SIMPL, Crestron Home*, Dry Contact Closures, Elan, Google Home via IFTTT, Josh.ai*, IP, IR, Lutron, Loxone, RS-232, RS-485, RTI, Savant, URC, 12v Trigger
NANO Zigbee shades - Alexa, Control4, Crestron SIMPL, Crestron Home*, Elan, Google home via IFTTT, IP, IR*, Lutron*, RS-232*, RS485*, RTI*, Savant, URC*

NANO RTS shades - Alexa, Control4, Crestron SIMPL, Crestron Home*, Dry Contact Closures, Elan, Google Home via IFTTT, Josh.ai*, IP, IR, Lutron, Loxone, RS-232, RS-485, RTI, Savant, URC, 12vTrigger

*-Coming Soon

System Size

Janus - Each Janus powers up to 8 devices, and up to 255 devices per segment.

RTS - RTS systems can control up to 255 devices using LinkPro

Environment


Operating temperature range is normal ambient (32 to 110 degrees), and humidity levels up to 90%. Not meant for wet environments



NANO BOX 375 COUPLED

v1.5 | 24 May 2022

Measure your shade

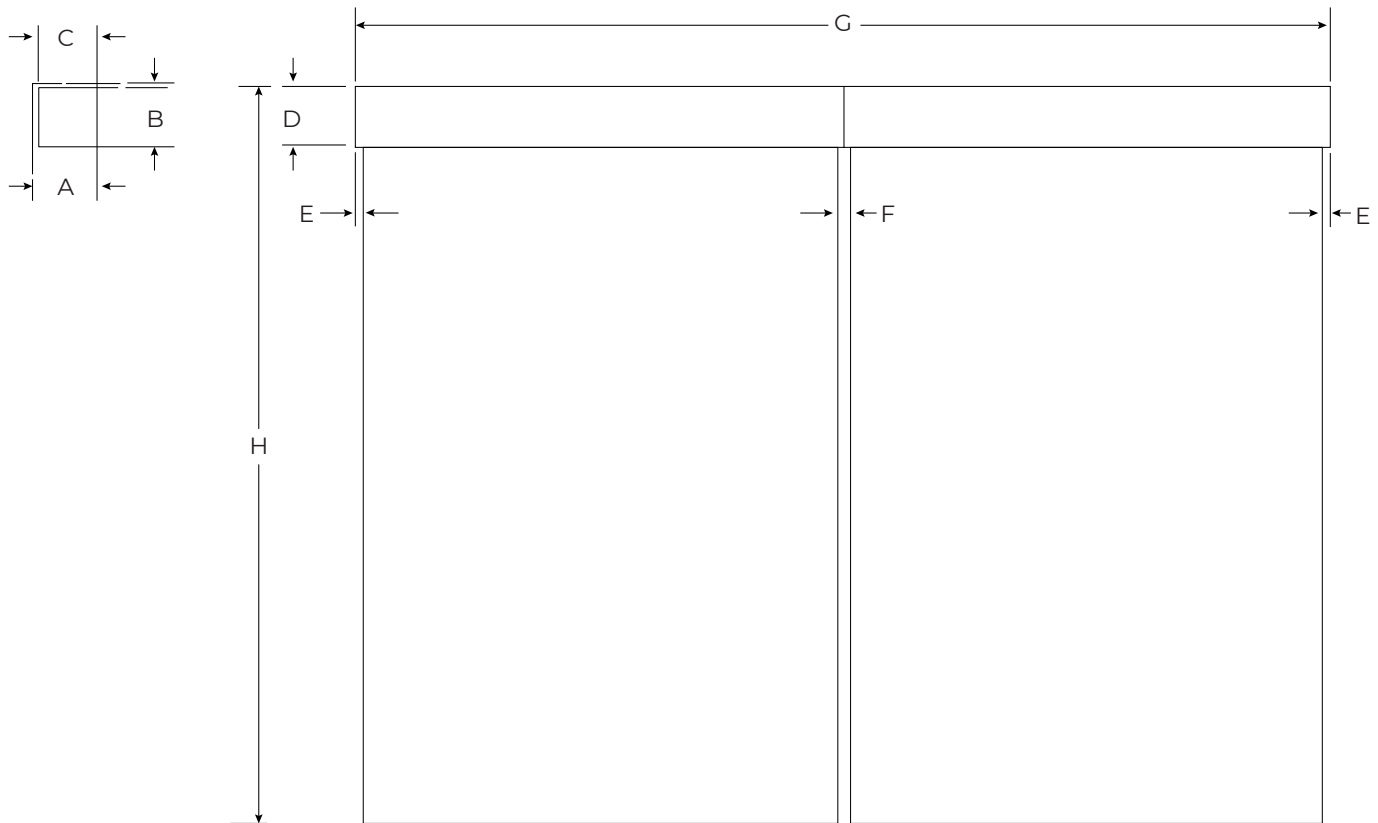


| Series | 375 | |
|--------|----------------------|----------|
| Motor | DC | AC |
| A | 4 7/16" | 4 7/16" |
| B | 3 15/16" | 3 15/16" |
| C | 3 15/16" | 3 15/16" |
| D | 3 11/16" | 3 11/16" |
| E | 3/4" | 3/4" |
| F | 1" | 1" |
| G | Ordered Shade Width | |
| H | Ordered Shade Height | |




NANO BOX 375 COUPLED

v 1.5 | 24 May 2022

Nano Box 375 Coupled Measurements

| | Height & Depth | | Max. Width | | Min. | Max. | | |
|-------------|---|----------|-------------------|-----------|------------------------|--------------|--------------|-----------|
| | Cassette | Cassette | Motors | Control | Width | Width | Height | Light Gap |
| 375 Coupled |  3.7" (94mm) 3.9" (99mm) | 15' | Low Voltage (DC) | RTS / 485 | **Drive side 37 1/8 | Up to 180 | Up to 192 | Std. 3/4 |
| | | | Line Voltage (AC) | RTS / 485 | **Drive side 38 | | | Inner 1 |

Box and Bracket Dimensions

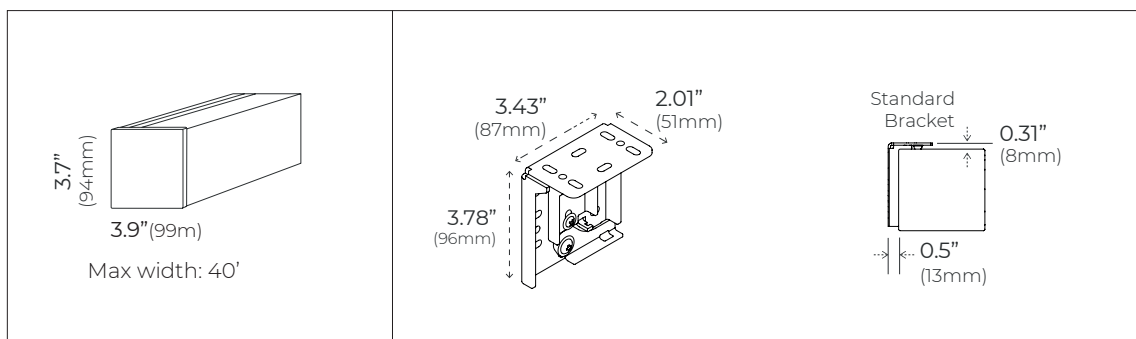

Note: Non-drive segments can be as narrow as 15 1/2"