


## Biggest little screen

### Features

- World's smallest screen case system
- Compact design can be easily transported and installed
- Power in 3 available motor types including patent-pending magnetic rechargeable, 24v low-voltage, and AC power
- 7 cassette color options with matching end caps
- 5 different kinds of brackets available for mounting, including Suspended Ceiling install option.
- Available in 10 screen material options.

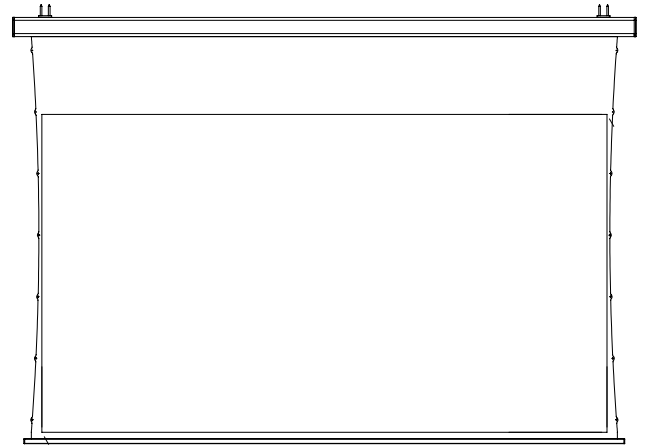


### Solo Pro 2 Specifications


*For illustration purposes only*

### Compatible power sources


Configurable in 3 available motor types:



Rechargeable  
RTS



24v DC  
RTS | 485



110v AC\*  
RTS | 485

\*220v AC available for international

### Aspect Ratios

16:9 | 16:10

Passed third party fire performance evaluation in accordance with underwriters laboratories (UL) 2043-13, fire test for heat and visible smoke release for discrete products and their accessories installed in air-handling spaces

### Colors

Available in 7 colors for the ultimate finish and durability.

White, Warm White, Clear Anodized, Taupe, Char Brown, Dark Grey and Black cassette and matching end caps

### Sizes

Medium | Large

### Methods of Control

Wired Integration and control

- 485 - IP control for all popular control systems
- Serial 232\*
- Contact closure\*
- 12v trigger\*

\*when using SI supported gateway

Wireless Integration and control

- RTS (global and local)
- IR




## Technical Specifications


### Power

- Low Voltage Power, with operating voltage: (class 2, 24-28v DC)
- Power supply features over/under-voltage, over/under current, and thermal protection for all devices in the system
- Electrostatic isolated and galvanic isolation when used with Janus
- Power must be derived from a Screen Innovations supplied power source for all low-voltage and charging


### Bracket Options




Zero Gap Wall




Décora Ceiling



Décora Flying



Ceiling/Wall  
Locking (incl. std.)



Suspended Ceiling

## Flexible Configuration

- Systems we integrate with:

**SOLO/PRO 2 485 screens** - AMX, BCP, Control4, Crestron SIMPL, Crestron Home\*, Dry Contact Closures, Elan, IP, IR, Lutron, Loxone, RS-232, RS-485, RTI, Savant, URC, 0-10v, 12v Trigger NANO RTS shades - Alexa, Control4, Crestron SIMPL, Crestron Home\*, Dry Contact Closures, Elan, Google Home via IFTTT, Josh.ai\*, IP, IR, Lutron, Loxone, RS-232, RS-485, RTI, Savant, URC, 12v Trigger NANO Zigbee shades - Alexa, Control4, Crestron SIMPL, Crestron Home\*, Elan, Google home via IFTTT, IP, IR\*, Lutron\*, RS-232\*, RS485\*, RTI\*, Savant, URC\*

**SOLO/PRO 2 RTS screens** - Alexa, Control4, Crestron SIMPL, Crestron Home\*, Dry Contact Closures, Elan, Google Home via IFTTT, Josh.ai\*, IP, IR, Lutron, Loxone, RS-232, RS-485, RTI, Savant, URC, 12vTrigger








## Environment

Operating temperature range is normal ambient (32 to 110 degrees), and humidity levels up to 90%. Not meant for wet environments

## Material Options

- Slate 1.2
- Slate 0.8
- Pure Gray .85
- Pure White 1.3
- Short Throw
- Slate AT 1.2
- Slate AT 0.8
- Pure Gray AT .85
- Pure White AT 1.3
- 360 Rear - Pro

## Screen Sizes and Measurements

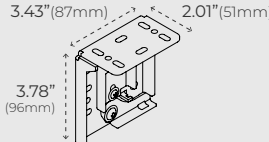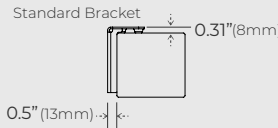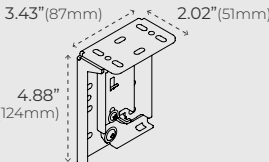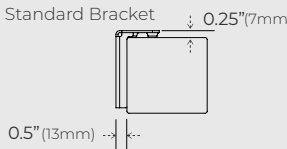		Max Drop*			Motor			Orientation	
		12"	24"	36"	Lithium RTS	Low Voltage RTS   RS485	AC (110v) RTS   RS485	Reverse	Standard
Max Diagonal	80" - 106"	M	M	NA	M	M	M	M	M
	107" - 110"	M	M	L	M	M L	M L	M	M L
	111" - 160"	L	L	L	NA	L	L	NA	L
M	 3.687" (94mm) 3.5" (90mm)	 3.43" (87mm) 2.01" (51mm) 3.78" (96mm)	 Standard Bracket 0.31" (8mm) 0.5" (13mm)	Reverse Orientation					
Medium				 Standard Bracket 3.38" (86mm)					
L	 4.75" (121mm) 4.625" (117mm)	 3.43" (87mm) 2.02" (51mm) 4.88" (124mm)	 Standard Bracket 0.25" (7mm) 0.5" (13mm)	NA					
Large									
NA	Not Applicable								

\*For Short Throw screen material, max. size is 100", and max. drop is 2"