



SITUO RTS REMOTES

v 1.0 | 12 July 2022

RTS, 1 and 5 Channel Remote

Features

- The Situo 1 RTS remote control allows an RTS channel of one or more shades/screens to be controlled.
- The Situo 5 RTS remote control allows up to 5 RTS channels of one or more shades/screens to be controlled.

Power Supply

1 type CR2032 battery, 3v

Operating Temperature


0°C to +48°C

Frequency

433.050 - 433.42 MHz

Radio Range

65'

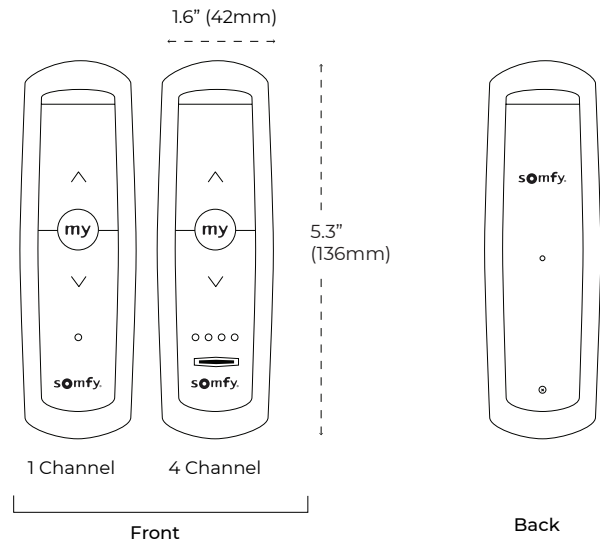

Situo RTS Remotes Specifications

For illustration purposes only

Dimensions

Pure Model

5.3"L x 1.6"W x .8"H

(134mm x 41mm x 21mm)

Parts in the Box


1 Channel (#1870571), 5 Channel (#1870575)

Situo RTS remote control, Mounting pin, Bracket, Plug, Screw, Identification sticker.

Works with

- Link Pro Z
- TaHoma
- Nano Shades
- Zen 2 shades
- Solo 3 (coming soon)
- Smart Plug (via TRO.Y)

Connections & Indicators

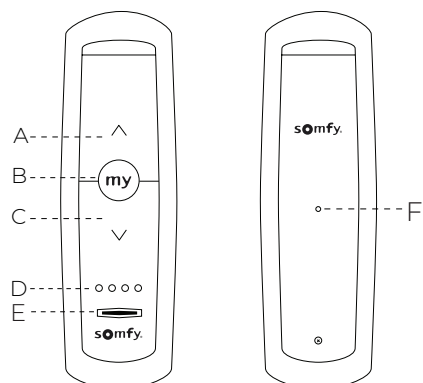

Element		Function
A	Up Button	Up Directional Button
B	“MY” button	“MY” favorite position or STOP button
C	Down button	Down Directional button
D	LED indicators	Illuminates to confirm current RTS channel
E	Channel selector switch	Change between RTS channels button
F	Program button	To pair with motor

Note: This chart assumes a standard motor rotation