



Bond Bridge Pro (BBP)

v 1.1 | June 2023

Voice and SI App Bridge

Features

- Includes 1 J4M35 integration license
- Full integration with TRO.Y for any Zigbee/485/ PoE motor
- Control of RF Shades, screens, ceiling fans and fireplaces
- Host the SI App
- 2.4GHz Wi-Fi, Ethernet +PoE
- Live tech support through SI App
- Wider Range: 3500 sqft.
- Connectivity up to 100 devices

Max Sub-GHz range

35m (3500 sqft) radius

Power

110-220V USB adapter incl.
PoE 802.3/at compatible
(Injector not incl.)


Radio Frequency

431 - 437 MHz

Integrations

BBP is focused on compatibility and supports a wide range of optional integrations:

- | | |
|--------------|-------------------|
| • Control 4 | • Amazon Alexa |
| • ELAN | • Apple HomeKit |
| • RTI | • SmartThings |
| • URC | • Josh.ai |
| • Savant | • Somfy |
| • Crestron | • Rollease Acmeda |
| • Hey Google | • Nice |

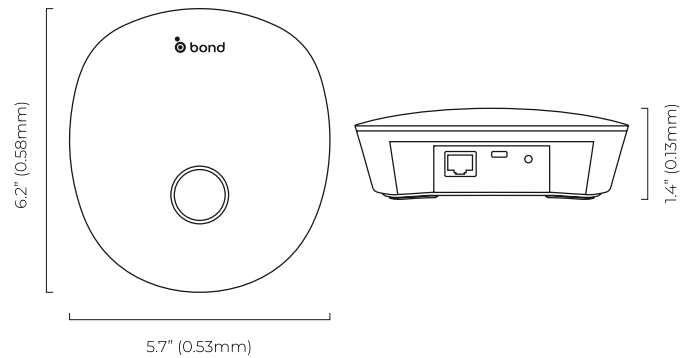

BBP Specifications

For illustration purposes only

Dimensions

1.4" D x 5.7" W x 6.2" H
(0.13mm x 0.53mm x 0.58mm)

Parts in the Box

800043

BBP Unit (1), J4M35 Integration license (1), USB cable (1), USB Power Supply (All inclusive international plugs) (1), Mounting Hardware (1), Quick Start Guide (1)

Works with

- Nano shades
- Zen 2 shades
- Solo 3 screen
- TRO.Y 2
- Pico remotes
- 3rd party ceiling fans
- 3rd party fireplaces