



Universal Shade Remote Control

Features

- Mix & match shade motor types on single remote
- Multiple channels can be selected and controlled simultaneously
- Control multiple devices in the same channel
- Pairs directly with the shade, but also works seamlessly with Pegasus, Bond Bridge Pro (BBP)
- Limit-setting fully supported (For RF shades)
- Securely flush mounts to a wall with or without a junction box
- Compatible with standard decora cover plates
- Optionally functions as a handheld remote
- Provides state feedback to Bond Bridge Pro (BBP)
- 10 year battery life

Max Sub-GHz range


23m (2500 sqft) radius

Radio Frequency

431 - 437 MHz

Easy Installation

Wiring is not needed. Simply pair Sidekick directly with the shade, without the manufacturers controller, set the shade limits, and fix it to your wall.

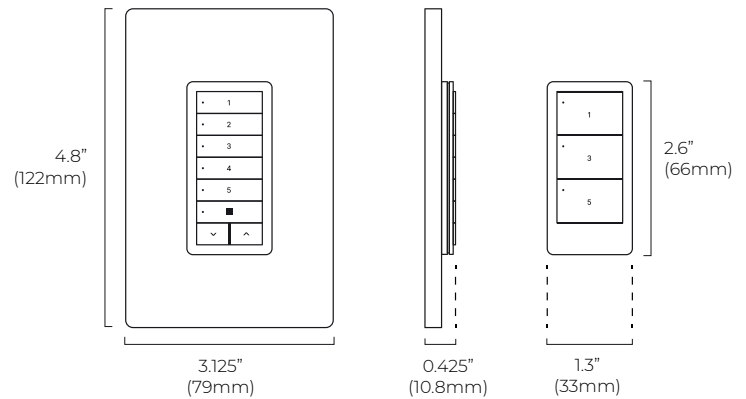

Sidekick Specifications

For illustration purposes only

Dimensions

0.425" D x 3.125" W x 4.8" H
(10.8mm x 79mm x 122mm)

Parts in the Box

#800047

Sidekick Gen 2 (1), 5-channel/8-key button set (1), 1-channel/3-key button set (1), backplate (1), CR2430 battery (1), Screws (2), Drywall Anchors (2)

Works with

- Nano shades
- Zen 2 shades
- Solo 3 screen
- TROY 2
- SI App (BBP)
- Smart Plug
- Pegasus
- Moab